


Quick Reference Guide for Ordering AF-7 Wear Plates

This service bulletin is meant to be used as a quick reference guide for ordering replacement wear plates for the AF-7 Cuber. Wear resistant steel is used in the manufacture of these plates. However, it is not unusual for these plates to wear out in one year or less. The life of the plates depends on the abrasion they are subjected to and the amount of block processed.

Note: There are different versions of the Large Turntable Apron Plate (Key 7), the Overhead Block Transfer Accumulator Plates (Keys 8 & 9), and the Cuber Slider Plate (Key 10). Therefore, we recommend that you compare the dimensions of your old plate to the dimensions listed in the following parts list to make sure that you are ordering the proper plate.

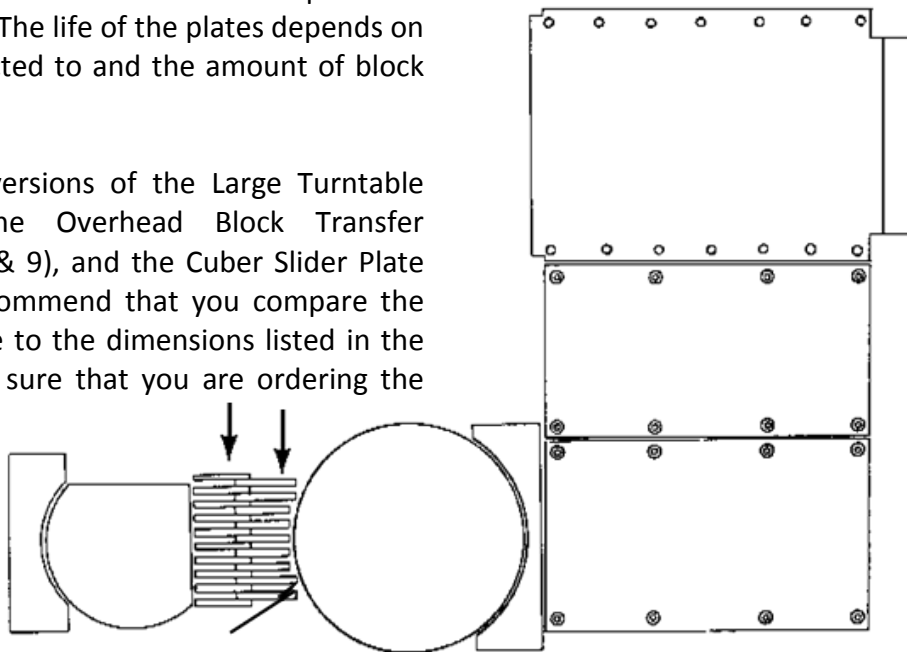

AF-7 Wear Plates Parts List

KEY	PART NO.	PCS.	DESCRIPTION
1	419897	1	Small Turntable Apron Plate
	089672	4	1/2" X 2" Long Flat Socket Head Cap Screw
	087881	4	1/2" Lockwasher
	087806	4	1/2" Nut
2	419893	1	Small Turntable Wear Plate
	089657	4	1/2" X 1-1/4" Long Flat Socket Head Cap Screw
	087862	3	1/2" Hex Jam Nut
	087904	3	1/2" Internal Tooth Lockwasher
3	419853	10	Trolley Wear Strip - 5/8" X 1" X 8-1/4" Long
	088026	20	3/8" X 3" Long Hex Head Cap Screw
	087879	20	3/8" Lockwasher
4	419854	4	Trolley Wear Strip 3/4" X 1" X 9-1/8" Long

Quick Reference Guide for Ordering AF-7 Wear Plates

KEY	PART NO.	PCS.	DESCRIPTION
	088020	8	3/8" X 2" Long Hex Head Cap Screw
	087879	8	3/8" Lockwasher
5	419855	5	Trolley Wear Strip 3/4" X 1" X 7-1/2" Long
	088020	10	3/8" X 2" Long Hex Head Cap Screw
	087879	10	3/8" Lockwasher
6	419871	1	Large Turntable Wear Plate
	103357	4	1/2" X 1-1/2" Long Flat Socket Head Cap Screw
	087881	4	1/2" Lockwasher
	087806	4	1/2" Hex Nut
7	419872	1	Large Turntable Apron Plate for AF-7 3/8" X 7-3/4" X 27" Long
	421328	1	OR Large Turntable Apron Plate for AF-7B 3/8" X 10" X 33" Long
8	421314	1	Accumulator Plate for 48" Model 3/8" X 30" X 48" Long
	419452	1	OR Accumulator Plate for 48" Model 3/8" X 26" X 48" Long
	421300	1	Accumulator Plate for 64" Model 3/8" X 30" X 64" Long
	419453	1	OR Accumulator Plate for 64" Model 3/8" X 26" X 64" Long
	103357	10	1/2" X 1-1/2" Long Flat Socket Head Cap Screw
	087881	10	1/2" Lockwasher
	089657	4	1/2" X 1-1/4" Long Flat Socket Head Cap Screw
9	406861	1	Accumulator Plate for 48" Model 3/8" X 29-7/16" X 48" Long
	406752	1	Accumulator Plate for 64" Model 3/8" X 29-7/16" X 64 Long
	103357	10	1/2" X 1-1/2" Long Flat Socket Head Cap Screw
	087881	10	1/2" Lockwasher
	087806	10	1/2" Nut
10	417421	1	Slider Plate for SF-7W 48" Model 59" X 54-1/2" Long
	417350	1	Slider Plate for SF-7W 64" Model 59" X 70-1/2" Long
	407186	1	Slider Plate for SF-7 48" Model 57" X 54-1/2" Long
	407188	1	Slider Plate for SF-7 64" Model 57" X 70-1/2" Long
	088015	18	3/8" X 1" Long Hex Head Cap Screw
	087929	18	3/8" Flat Washer
	087879	18	3/8" Lockwasher